

HD+ 110 VT


Tandem roller with vibrating roller drum and set of tyres
Tandem rollers Series HD+ / Series H258









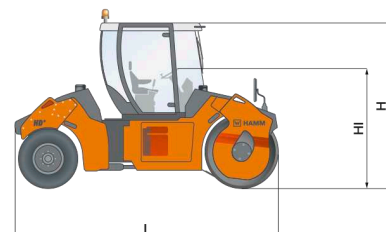

HIGHLIGHTS HD+

- > 3-point articulation for even weight distribution and excellent on-centre feel
- > Simple, intuitive and language-neutral operation
- > Excellent view of the machine and the construction site
- > Seat operating unit can be moved and rotated
- > Track offset for comfortable start up, moving away and compacting at curb edges

Machine dimensions		
Total length (L)	mm	4600
Width (B)	mm	1800
Total height (H)	mm	3050
Drum width (X)	mm	1680
Height loading, min. (Hl)	mm	2185



TECHNICAL DATA		Unit	HD+ 110 VT
	Weights		
	Operating weight with cab	kg	10095
	Operating weight with ROPS	kg	9935
	Operating weight, max.	kg	10810
	Static linear load, front	kg/cm	32,4
	French classific., data/class		29,2.11,6/VX2.PLO
	Machine dimensions		
	Total length	mm	4600
	Total height with cab	mm	3050
	Height loading, min.	mm	2185
	Wheel base	mm	3400
	Total width with cab	mm	1800
	Max. working width	mm	1820
	Kerb clearance, left/right	mm	790/790
	Turning radius, inside	mm	5250
	Drum dimensions		
	Drum width, front	mm	1680
	Drum diameter, front	mm	1200
	Drum thickness, front	mm	22
	Drum type, front		Smooth/non-split
	Track offset, left/right	mm	170
	Wheel dimensions		
	Size of tyres, rear		11.00-20
	Width over tyres, rear	mm	1620
	Number of tyres, rear		4
	Diesel engine		
	Manufacturer		DEUTZ
	Version		TCD 2012 L04 2V
	Number of cylinders		4
	Power rat. ISO 14396, kW/PS/rpm		100,0/136,0/2300
	Power rating SAE J1349, kW/HP/rpm		100,0/134,0/2300
	Emission standard		EU Stage IIIA / EPA Tier 3
	Drive		
	Speed, working gear	km/h	0-5,0
	Speed, transportation gear	km/h	0-11,0
	Regulation, infinitely variable		Hammtronic
	Climbing ability, vibration on/off	%	30/40
	Vibration		
	Vibration frequency, front, I/II	Hz	42/50
	Amplitude, front, I/II	mm	0,81/0,47
	Centrifugal force, front, I/II	kN	120/99
	Steering		
	Oscillation angle +/-	°	10
	Steering, type		Articulated steering
	Sprinkler system		
	Water sprinkler, type		Pressure
	Tank capacity/Fill capacity		
	Fuel tank, capacity	L	150
	Water tank, capacity	L	760
	Additive tank, capacity	L	22
	Sound level		
	Acoustic power LW(A), sticker		108
	Acoustic power LW(A), measured		107

EQUIPMENT

2 water pumps, Foldable scraper, Dashboard with displays, indicator lights and switches, Tilttable dashboard, Spring-mounted driver's seat with armrests and safety belt, Hammtronic - electronic machine management, Seat-operating unit, can be moved and rotated laterally, Track offset, Vibration parameters, adjustable individually, Spray system with spray bars front and rear, Water filtering (triple), Water tank front and rear, can be filled from both sides, Central water drain

OPTIONAL EQUIPMENT

ROPS cabin with split doors, ROPS, rigid, Air conditioning, Steering column with comfort exit and tilttable dashboard, Safety belt monitoring device, Additional drive lever, left, Radio, HCQ Navigator, Protective roof, Edge pressing and cutting equipment, Version with additional fuel prefilter, HAMM Compaction Meter (HCM), HAMM Temperature Meter (HTM), Track offset display, Camera system, Rotating beacon, Drum edge lighting

HAMM AG
Hammstraße 1
D-95643 Tirschenreuth
Tel +49 9631 80-0
Fax +49 9631 80-111
www.hamm.eu

